


Indoor Infrared Mini High Speed Dome Camera



Dimension

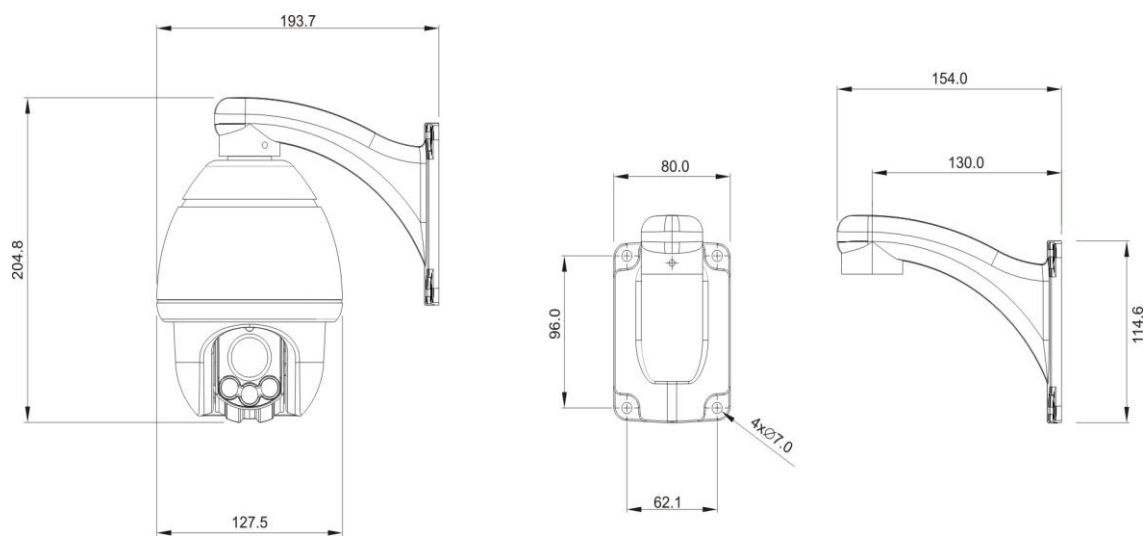

Features

- ※ 3pcs high-power infrared light, turn divided into two groups, no flashlight, IR distance 30-40M;
- ※ 360° endless pan range and 0° - 90° tilt range, support auto-flip, non-surveillance blind area;
- ※ Max.pan prest speed 200°/s and max.tilt speed of 60°/s;
- ※ Support 220 presets;
- ※ 8 patrols, each patrol can contain up to 32 presets;
- ※ 4 patterns, can totally record up to 10 minus;
- ※ Proportional zoom function,rotation speed can be adjusted automatically according to zom multiples;
- ※ Support park action, presets/pattern/patrol/pan scan can invoke automatically after a defined time of inactivity (contain the idling condition after the power supply has been turn on).

Specification

Model	WS-MS2007IR-A	WS-MS2007IR-B
Function		
IR Distance	Effective IR distance 30m-40m	
Pan Range	360° endless	
Pan Speed	0.6° - 200°/s	
Tilt Range	0° - 90° (Auto Flip)	
Tilt Speed	3.5° - 60°/s	
Manual Speed	High, Middle, Low speed adjustable	
Proportional Zoom	Support	
Number of Presets	220	
Partol	8	
Pattern	4	

Scan between two preset			Support
Park Action	Support, selectable preset, cruise, pattern scan, two-line scan,automatic level		
Zone Scanning	Support		
PTZ Position Display	Support, can select on/off		
Alarm	No		
Zoom Module			
Horizontal Resolution	480TVL	650TVL	
Video System	PAL/NTSC		
Sensor	1/4" inch, SONY CCD	1/3" inch, SONY CCD	
Effective pixels	PAL:500(H) x 582(V) / NTSC:512(H) x 494(V)	PAL:960(H) x 582(V) / NTSC:967(H) x 494(V)	
illumination	0.01Lux		
Video output	1Vp-p Composite Output(75Ω/BNC)		
S/N	≥48dB		
Optical zoom	10X, F=5.0-50mm		
IR CUT	Standard IRCUT		
Aperture	Fixed Iris		
Angle of view	H 51.8°(W) - 5.86°(T); V39.1°(W) - 4.4°(T)		
Min. working distance	1m(W) - 2m(T)		
Focus	Auto/Manual		
Image effects	Auto/Color/Black/Negative		
Back-light compensation	On/Off		
White Balance	On/Off/indoor/outdoor		
Others			
Menu	English Menu		
RS485 Protocols	Pelco-D, Pelco-P,Hikvision,Dahua self-adaptive		
Power Supply	DC12V/2A		
Power Consumption	10W MAX(without heater)		
Working Temperature	-20°C - +60°C, ≤90%RH(frostless)		
Protection Grade	TVS3000V Lightning protection, surge protection and voltage transient protection, weather proof(for outdoor):IP66		
Outlook design	Mini 4 inch		
Package size(mm)	245mm x 245mm x 250mm		
Weight(kg)	2.0kg		
※※※Product specification are subject to change without notice ※※※			

www.winsafecctv.com