


1.4 MP HD 720P IP Dome Camera



Features

- ※ 1/3" SONY Exmor Progressive Scan CMOS Sensor;
- ※ 1.4 Megapixel, 30fps@1280*1024;
- ※ 3.6mm lens,0.01Lux;
- ※ Support PROFILE S, GB/T28181, FTP, RTSP,UPnP etc.;
- ※ Support Dual-stream, Mobile surveillance, Heartbeat Mechanism,3D-DNR
- ※ RJ45, Video Loop, DC-12V;
- ※ Optional: 1. SD card slot, Audio & Alarm I/O, RS485 2. PoE.

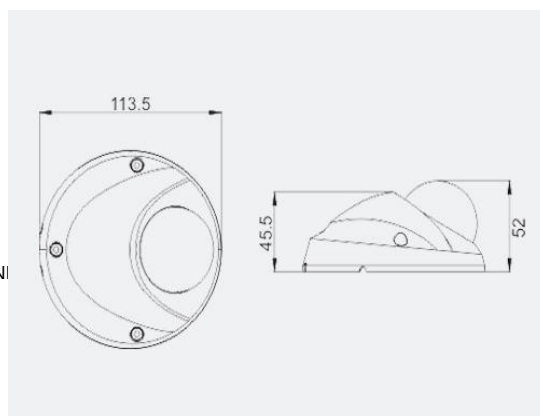

Specification

Model		WS-IP213
Hardware		
SOC		Hi3518A
Image Sensor		1/3" SONY Progressive Scan Exmor CMOS
Effective Pixels		1280(H) x 1024(V)
Interface		
Optical Lens	Interfaces	M12
	Iris	Fix Iris
	Focal Length	3.6mm
Audio Talkback		1CH MIC External access,3.5mm AV interface(Optional)
Audio Output		1CH speaker output, 3.5mm AV interface(Optional)
Network Interface	Lan	10/100M BASE-TX,RJ-45 connector
RS485		N/A
Alarm I/O		1ch Alarm input or 1ch alarm output(optional)
Memory Slot		Micro SD, Max 32GB
Audio & Video Encoding		
Video Compression		H.264 Main Profile,;MJPEG Baseline
Resolution	Main Stream	1280x1024/1280x960/1280x720;1-25fps(Adjust)
	Sub Stream	704x576/640x480/640/352/352x288/320x240; 1-25fps(Adjust)
Video Bitrate		30Kbps - 16Mbps, Supports CBR/VBR
Tilt OSD Settings		Support channel name, date and video stream information overlay
		OSD location is adjustable
Privacy Mask		4 Configurable regions
Image Orientation		image flip and mirror

Auto Image Control Functions		Auto Exposure Control(AEC), Auto White Balance(AWB);Auto Gain Control(AGC)
Manual Image Controls		Color saturation, hue, gamma, sharpness(edge enhancement)
Others		Anti Fogging/Anti Trembling/IR Detection/IRIS
Audio Compression		G7.11A/G7.11U/G7.26
Two Way Audio		support
Date transmission & Storage		
Date storage		Video and Image
Recording		Recording set up to record by Auto or Manual(motion and alarm trigger, schedule)
Alarm Output		FTP,E-Mail
Network Protocol		TCP/IP,UDP,RTP,TRST,TRCP,HTTP,DNS,DDNS,DHCP,FTP,NTP,PPPOE,SMTP,UPNP
Wireless protocol		-----
ONVIF protocols		Support PROFILE S
Remote View	PC	IE 6.0 Above, firefox, Google Chrome
	Mobile Phone	Support Windows Mobile, Symbian, iPhone, Android system
	Max. User Access	5 users
General Parameters		
Enviromental Casing		Aluminum alloy Housing, Indoor use
Installation		Ceiling mount
Opetration Temperature		- 10 °C ~ 50 °C
Opetration Humidity		0%-85%RH
Power		DC12V
POE		Support
Power Consumption		2.4W
Dimension		Φ113.5×H52mm
Weight		256g
Product specification are subject to change without notice www.winsafecctv.com		