


1.4MP IR Varifocal Waterproof IP Camera



Features

- ※ 1/3" CMOS Sensor Progressive Scan, 1.4MP;
- ※ IR 60Meter, 1pcs OSRAM Array LED, 2.8-12mm lens;
- ※ Support Static IP (IP address, Subnet Mask, Gate way and DNS can be set);
- ※ Support PPPOE, RSTP, VLC, NTP, UPNP;
- ※ Streaming switchable (Audio streaming or video streaming);
- ※ Support Image Adjusting (brightness, contrast, color and saturation);
- ※ Support VBR, VBR setting.

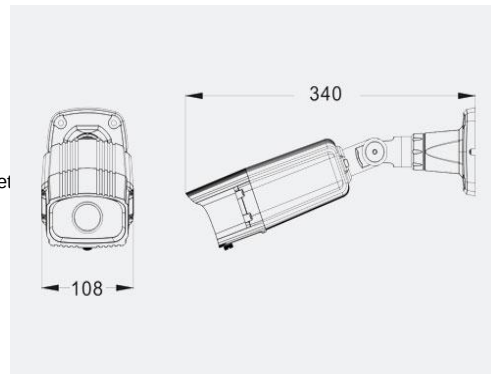

Specification

Model	WS-IP216B
Pick-up Device	1/3" CMOS Sensor Progressive Scan
Picture Element	1.4Mega pixel 1280x720(720P)
Min.illumination	0LUX(IR ON)
Lens Mount	2.8-12mm
S/N Ratio	More than 50dB
Electronic Shutter	1/50s - 1/4,000s
IR Distance	60M
BLC	Auto
Synchronous System	INT
Video Compression	H.264
Bit Rate	1Mbps-8Mbps, CBR/VBR Adjustable
Frame Rate	1280x720@30fps, 704x576@25fps, 352x255@25fps
Image Adjustment	Brightness, contrast, color adjustable through IE or CVS
Protocol	TCP/IP, HTTP, DHCP, DNS, DDNS, FTP, NTP, PPPOE, RTSP, UDP, UPNP, SMTP, RTP
Communication	RJ45(10M/100M Auto)
Operation temp.	-10°C - +50°C
Voltage	DC 12V±10%
Power Consumption	90mA (IR ON MAX 1200mA)
Measure	L340mm*W108mm
Weight	1150g
Material	Aluminum alloy

※※※Product specification are subject to change without notice ※※※

www.winsafecctv.com