


560TVL WDR Box Camera(WS-WR002)



Features

- ※ SONY vertical double-density interline 1/3" CCD.
- ※ High resolution 560TV Lines super low illumination.
- ※ Parameters for high light area and dark area can be adjusted separa
- ※ DC12V power supply.
- ※ OSD MENU.
- ※ Sense Up function, improve the effect under low illumination at night.
- ※ Privacy Zone Masking function.
- ※ Shutter speed adjustable from 1/50 to 1/90000S.

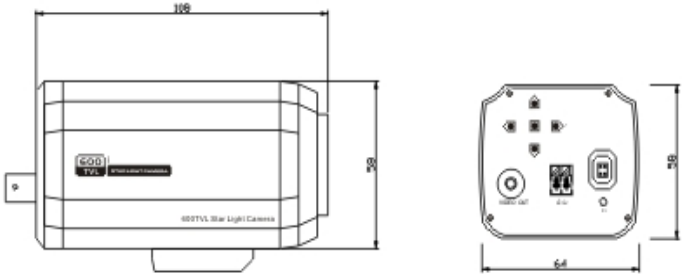

Specification

Model No.	WS-WR002N	WS-WR002P
Line Scan Frequency	15.734kHz	15.625kHz
Filed Scan Frequency	59.94Hz	50.00Hz
Effective Pixels	768(H) x 494(V)	752(H) X 582(V)
Electronic Shutter	1/60 - 1/90,000sec	1/50 - 1/90,000sec
Sensor	SONY vertical double-density interlind 1/3" CCD	
Scan Mode	2:1 Interlace Scan	
Resolution	560TVL Lines(Color) / 620TVL Lines(B/W,Signal Enhancement)	
illumination	0.2Lux at F1.2(Color Mode)/0.05Lux at F1.2(B/W Mode)/0.0002Lux at F1.2(Sense Up Mode)	
S/N Ratio	54dBMin.(AGC OFF)	
Iris Control	DC AUTO IRIS(Shutter speed 1/50 - 1/90,000)ELC	
AWB	Indoor/Outdoor/Manual Modes	
WDR	ON/OFF	
SYNC, Mode	INT./EXT. 2 Modes	
Privacy Masking	ON/OFF(8 Areas for Option)	
Motion Detect Alarm	ON/OFF(4 Areas for Option)	
Mirror	OFF/H-MIRROR/V-MIRROR/ROTATION FOR OPTION	
AGC	OFF/LOW/MIDDLE/HI OPTIONAL	
Sense Up	OFF/1X-128X	
D/N Mode	Auto/Day/Night/EXT.Control for option	
D-Zoom	1x - 8x	
Video Signal	1.0Vp -p/75Ω Video,0.714Vp-p Composite,0.286Vp-p	
Lens	Cannon Lens f=3.9mm F=1:1.2 DC Auto Iris	
Power Supply	12V DC Power Supply	
Power Consumption	2.2W(DC)	
Size	64(W) x 58(H) x 108(L) mm	
Storage Temperature	-40 ℃ - +60℃	
Operation Temperature	- 10 ℃ - +50℃	
Humidity Range	20%-90%	
Weight	300g	

※※※Product specification are subject to change without notice ※※※