


1.4MP Pinhole IP Camera

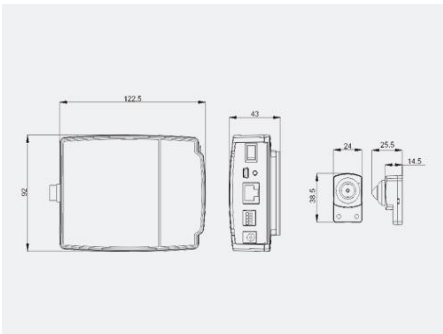

Features

- ※ 1/3" SONY Exmor Sensor Progressive Scan,1.3MP;
- ※ Support static IP(IP address,subnet mask,gateway and DNS setting available);
- ※ Support PPPOE, RTSP, VLC, NTP,UPNP;
- ※ Streaming switchable(Audio streaming or video streaming);
- ※ Support Image adjustable(Brightness, contrast, hue, saturation);
- ※ Support VBR nad CBR, VBR setting;
- ※ 3D DNR, D-WDR, Antifog, Antistemble;
- ※ PoE optional;
- ※ 5 user IE viewing in the same time,4 mask zone;
- ※ 4CH multiscree play back in the same time.

Specification

Model		WS-IP314
Hardware		
SOC		Hi3518A
Pick-up Device		1/3" Sony progressive scan EXMOR CMOS,1.3Megapixel
Effective Pixel		1280(H) x 1024(V)
Interface		
Optical Lens	Interfaces	Pinwhole 3.7mm/4.5mm
	Iris	N/A
	Focal Length	N/A
Audio Talkback		1 CH 3.5mm AV interface
Audio Output		1 CH 3.5mm AV interface
Network Interface	Lan	10/100M BASE-TX, RJ-45 connector
RS485		RS485 port optional
Alarm I/O		1ch Alarm input or 1ch alarm output
Memory Slot		Micro SD Card slot, Max 32GB
Audio & Video encoding		
Video Compression		H.264 Main Profile; MJPEG Baseline
Resolution	Main Stream	1280*1024/1280*960/1280*720; 1-25fps(Adjust)
	Mub Stream	720*576/640*480/640*352/352*288/320*240;1-25fps(Adjust)
Video Bitrate		30Kbps -- 16Mbps, Supports CBR/VBR
Title OSD Settings		Support channel name, date, and video stream information overlay
		OSD location is adjustable
Privacy Mask		4 configurable regions
Image Orientation		Image Flip and Mirror
Auto Image Control Functions		Auto Exposure Control(AEC); Auto White Balance(AWB);Auto Gain Control(AGC)
Manual Image Controls		Color saturation, hue, gamma, sharpness(edge enhancement)
Others		Anti Fogging/Anti Trembling/IR Detection/IRIS
Audio Compression		G.711A/G.711I/G.726
Two Way Audio		Support
Date Transmission and Storage		
Date Storage		Video and Image
Recording		Recording set up to record by Auto or manual(motion and alarm trigger, schedule)
Alarm Output		FTP, E-Mail
Network Protocol		TCP/IP、 UDP、 RTP、 RTSP、 RTCP、 HTTP、 DNS、 DDNS、 DHCP、 FTP、 NTP、 PPPOE、 SMTP、 UPNP
Wireless product(-W)		N/A
ONVIF protocol		Support 2.2 version
Remote View	PC	IE 6.0 Above, firefox, google chrome
	Mobile Phone	Support Windows Mobile, Symbian, iPhone, Android system
	Max.User Access	5 users
General Parameters		
Environmental Casing		Aluminum alloy housing, Indoor Use
Installation		Different bracket optional
Operation Temp.		- 10 °C -- 50°C
Operation Humidity		0% -- 85%RH
Power Supplier		DC12V
POE		Optional
Power Consumption		
Dimension		L3.8mm x W2.3mm x H2.3mm(Camera) & L90mm x L110mm x H30mm(function box)
Weight		350g

※※※Product specification are subject to change without notice ※※※

www.winsafecctv.com